

05/14/99  
JCS83 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. **MARSP0114US**  
First Inventor or Application Identifier **John Maurice Bird**  
Title **A COIL FOR A MAGNET AND A METHOD OF**  
Express Mail Label No. **EJ464632227US**

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
- ☒ Specification [Total Pages **10**]  
(preferred arrangement set forth below)
  - Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the invention
  - Brief Summary of the invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **3**]
- Oath or Declaration [Total Pages **1**]
  - ☐ Newly executed (original or copy)
  - ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - ☐ Computer Readable Copy
  - ☐ Paper Copy (identical to computer copy)
  - ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

- ☐ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449
- ☒ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
- ☐ \* Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)
- ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
- ☒ Other: **Letter Identifying the Inventors & Certificate of Mailing**

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For **CONTINUATION** or **DIVISIONAL APPS** only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Neil A. DuChes, Esq.				
	RENNER, OTTO, BOISSELLE & SKLAR, P.L.L.				
Address	1621 Euclid Avenue				
	Nineteenth Floor				
City	Cleveland	State	Ohio	Zip Code	44115
Country	U.S.A.	Telephone	216-621-1113	Fax	216-621-6165

Name (Print/Type)	Neil A. DuChes	Registration No. (Attorney/Agent)	26,725
Signature		Date	5-14-99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re patent application of:

Express Mail No.: EJ464632227US

Filing Date: May 14, 1999

For: COIL FOR A MAGNET AND A METHOD  
OF MANUFACTURE THEREOF

Examiner: Unknown

Art Unit: Unknown

**Box Patent Application**  
**Assistant Commissioner for Patents**  
**Washington, D.C. 20231**

**PRELIMINARY AMENDMENT**

Sir:

Prior to the examination of the above-identified patent application, kindly enter the following amendments.

**AMENDMENTS**

**IN THE CLAIMS:**

Please amend claims 3, 4, 5, 6, 9, 10 and 11 as follows:

3. (Amended) A method as claimed in claim 1 [or 2] wherein the former is manufactured from a resilient material.

4. (Amended) A method as claimed in claim 1[, 2 or 3] wherein the flat or substantially flat former is formed by moulding.

5. (Amended) A method as claimed in [any preceding claim and] claim 1, further comprising the step of securing the former after the step of bending the former.

6. (Amended) A method as claimed in [any preceding] claim 1 wherein the former comprises a groove and the electrical conductor is disposed in the groove.

9. (Amended) A coil as claimed in claim 7 [or 8] wherein a groove is defined in the former and the electrical conductor is disposed in the groove.

10. (Amended) A coil as claimed in [any of claims] claim 7 [to 9] wherein the former is tubular.

11. (Amended) An MRI system comprising a coil as defined in [any of claims] claim 7 [to 10], the coil constituting a gradient coil of the MRI system.

Please add the following new claims:

--13. (Added) A method as claimed in claim 2 wherein the former is manufactured for a resilient material.

14. (Added) A method as claimed in claim 13 wherein the flat or substantially flat former is formed by moulding.

15. (Added) A method as claimed in claim 2, further comprising the step of securing the former after the step of bending the former.

16. (Added) A method as claimed in claim 14, further comprising the step of securing the former after the step of bending the former.

17. (Added) A coil as claimed in claim 8 wherein a groove is defined in the former and the electrical conductor is disposed in the groove.

18. (Added) A coil as claimed in claim 8 wherein the former is tubular.

19. (Added) A coil as claimed in claim 9 wherein the former is tubular.

20. (Added) A coil as claimed in claim 17 wherein the former is tubular.--

### REMARKS


Claims 3, 4, 5, 6, 9, 10 and 11 have been amended in order to remove any multiple dependent claims. New claims 13-20 have been added. Support for the new claims exists in the specification as filed herewith.

Should the Examiner feel that a telephone interview would be helpful to facilitate favorable prosecution of the above-identified application, the Examiner is invited to contact the undersigned at the telephone number provided below.

Should any fees be due as a result of the filing of this response, the Commissioner is hereby authorized to charge Deposit Account No. 18-0988.

Respectfully submitted,

RENNER, OTTO, BOISSELLE & SKLAR, P.L.L.

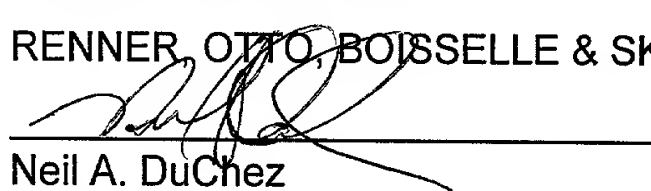  
Neil A. DuChes

Registration No. 26,725

DATE: May 14, 1999

The Keith Building  
1621 Euclid Avenue  
Nineteenth Floor  
Cleveland, Ohio 44115  
(216) 621-1113

### A Coil for a Magnet and a Method of Manufacture Thereof

This invention relates to a coil for a magnet and to a method of manufacturing a coil for a magnet. More particularly, it relates to a gradient coil and to a method of manufacturing a gradient coil and, in particular to a gradient coil for use in a magnetic resonance imaging (MRI) system.

MRI systems are used today for investigating a large variety of body parts. These systems are based on nuclear phenomena displayed by atomic nuclei having a non-zero magnetic moment (or "spin"). When such nuclei are placed in a static, uniform magnetic field, the nuclear spins are aligned by the magnetic field so as to be either aligned with or against the static magnetic field. The nuclear spins are not stationary, but precess around an axis defined by the magnetic field. The frequency at which the spins precess is known as the "Larmor frequency"  $\omega_0$ . The Larmor frequency is given by

$$\omega_0 = \gamma B_0 \quad (1)$$

where  $\gamma$  is the gyromagnetic ratio of the nucleus and  $B_0$  is the applied magnetic field. For a hydrogen nucleus,  $\gamma = 42.57 \text{ MHz/T}$ .

When the nuclear spins are aligned in the static magnetic field  $B_0$ , it is possible to "flip" the spins by applying an alternating magnetic field  $B_1$ . In order to do this, the alternating magnetic field must be at  $90^\circ$  to the static magnetic field and it must alternate at substantially the Larmor frequency. When such an alternating field  $B_1$  is applied the spins will tend to align themselves parallel to  $B_1$ , and when the alternating field is removed the spins will relax back into the state in which they are aligned with the static magnetic field  $B_0$ . The alignment of the spins with the alternating field

decreases the magnetisation in the longitudinal direction (parallel to  $B_0$ ) and increases the magnetisation in the transverse plane (that is, the plane perpendicular to  $B_0$ ), and the subsequent relaxation of the spins when the alternating field is removed produces the reverse effects. These changes in the magnetisation are detected in the MRI process, and are processed to provide a visible display of the nuclei.

Figure 1 at 11 shows a typical MRI system in block diagram form. The magnet 12 provides the static magnetic field  $B_0$ . In principle, the magnet 12 could be a superconductive magnet, an electro-magnet or a permanent magnet. However, a superconducting magnet is commonly used, since these readily provide a large, homogeneous static magnetic field. The magnet 12 contains a bore 12 enabling the entry of a patient into the static magnetic field. A patient shown at 14 is inserted into the bore 13 using bed arrangement 16 so as to be within the static magnetic field.

Radio frequency (r.f.) pulses generated by transmitter 22 and applied through multiplexer 23 and radio frequency coil apparatus 24 act to tip the aligned spins so as to have a projection, for example, in the X, Z plane; the X, Y plane or the Y, Z plane. The X, Y and Z nomenclature refers to the imaginary orthogonal axes shown at 21 used in describing MRI systems; where the Z axis is an axis co-axial with the axis of the bore hole. The Y axis is the vertical axis extending from the centre of the magnetic field and the X axis is the corresponding horizontal axis orthogonal to the other axes.

The spins when realigning after the radio frequency pulse is removed generate free induction decay (F.I.D.) signals which are received by the radio frequency coil apparatus 24 and transmitted through the multiplexer to the receiving circuit 26. From the receiving circuit the received signals go through the controller 25 to an image processor 27. The image processor works in conjunction with a display memory 28 to provide the image displayed on display monitor 29. It should be noted that the radio frequency coil apparatus 24 can comprise separate coils for transmitting and receiving or the same coil apparatus 24 could be used for both transmitting and receiving the r.f. pulses.

In order to spatially resolve the MRI signal, encoding signals within the static magnetic field are provided by gradient coils (not shown in Figure 1). There are typically three sets of gradient coils. X gradient coils alter the strength of the static magnetic field along the X axis, Y gradient coils alter the strength of the static magnetic field along the Y axis, and Z gradient coils alter the strength of the static magnetic field along the Z axis. The strength of the static magnetic field along other axes, such as the XZ axis for example, can be changed using two or three of the gradient coils in combination.

The X, Y and Z gradient coils are driven by X gradient driver 17, Y gradient driver 18 and Z gradient driver 19, respectively. It is possible to modify the static magnetic field  $B_0$  using the gradient coils so that only nuclei within a small volume element of the patient have a Larmor frequency equal to the frequency of the r.f. field  $B_1$ . This means that the F.I.D. signal comes only from nuclei within that volume element of the patient. In practice the gradient coils are supplied with time-varying electrical currents from a power supply, such as a power amplifier, so that the volume element in which the nuclei have a Larmor frequency equal to the frequency of the applied r.f. field is scanned over the patient so as to build up a 2-D or 3-D image of the patient.

A typical prior art set of gradient coils is disclosed in, for example, "Foundations of Medical Imaging" by Z.H. Cho et al (published by Wiley International), and is shown schematically in Figure 2. The X gradient coils are shown in Figure 2(a). Figures 2(b) and 2(c) show the Y gradient coils and the Z gradient coils respectively.

It will be noted that the X gradient coils and the Y gradient coils shown in Figures 2(a) and 2(b) are in the form of saddle coils. In each case, two saddle coils are placed either side of the  $Z = 0$  plane.

In the prior art, the gradient coils are constructed over a tubular base. In one possible arrangement, the X gradient coils are disposed over the tubular base, the Z gradient coils are placed over the X gradient coils, and finally the Y gradient coils are placed

over the Z gradient coils (although the order in which the gradient coils are provided on the former is not limited to this particular order).

As shown in Figure 2(c), the Z gradient coils are axial coils of solenoidal form. These axial coils are wound into pre-formed slots in an insulating former. The former is prepared by machining grooves in a fibreglass tube. The tube is then split into four sections, which are glued to the top of the X gradient coils. The Z gradient coils are then wound in the grooves in the fibreglass former using copper wire or copper bar 42. Figure 3(a) is a side view of such a prior art former 40 showing the grooves 41, and Figure 3(b) is an end view of the former of Figure 3(a).

To reduce the noise created by the Z gradient coils when they are energised, the grooves 41 in the former 40 are lined with a rubber sheet 43, as shown in Figure 4 which is an enlarged partial sectional view of the former of Figure 3(a). The rubber sheet 43 acts as a shock absorber and damps the vibration of the Z gradient coils thereby reducing the maximum acceleration of the coils and the noise generated by the coils in use (the vibrations are caused by the coils moving as a result of the magnetic forces acting on the coils).

It can therefore be seen that the prior art method of constructing the Z gradient coil is expensive. In particular, the construction of finely machined thin-walled glass-fibre tubes further cut into four sections is very costly. Moreover, two winding steps are required after the former has been glued in position: firstly the grooves are lined with the rubber sheet 43 and then, secondly, the copper wire or bar is wound into the rubber-lined grooves.

A first aspect of the present invention provides a method of manufacturing a coil for a magnet comprising: providing a curved former; and disposing an electrical conductor around the former;

wherein the step of providing the curved former comprises the steps of:

- a) manufacturing the former in a flat or substantially flat shape; and



- b) bending the former into a curved shape.

This method of the invention allows the former to be made in one piece and then bent into position around the underlying components. Thus, the former can be made of flat moulded elements, and these are much cheaper than machined ones.

In a preferred embodiment the former is manufactured from a resilient material. This eliminates the need to dispose a rubber layer on the former before winding the conductor.

A second aspect of the present invention provides a coil for a magnet, the coil comprising a resilient former and an electrical conductor disposed around the former. Use of a resilient former eliminates the need to provide a layer of rubber between the former and the conductor.

In a preferred embodiment the former is made of an elastomeric material.

The present invention also provides an MRI system comprising a coil as defined above. In a preferred embodiment the magnet constitutes a gradient coil of the MRI system.

The present invention also provides a method of manufacturing a coil for a magnet comprising the step of disposing an electrical conductor around a resilient former.

Preferred embodiments of the present invention will now be described with reference to the accompanying drawings in which

Figure 1 is a schematic view of an MRI system;

Figures 2(a), 2(b) and 2(c) are schematic views of a prior art set of X, Y and Z gradient coils;

Figure 3(a) is a side view of a prior art former on which the Z gradient coil is wound;

Figure 3(b) is a partial sectional view of the former of Figure 3(a); and Figure 4 is an enlarged partial view of Figure 3(a).

In the present invention the former on which the Z gradient coil is wound is constructed in one piece. It is moulded as a flat former, from a flexible, resilient material. The grooves in the former are formed during the moulding process by using a suitably shaped mould.

Since the former is moulded in a flexible material it can easily be bent into a tubular shape around the X gradient coil or other underlying component. The moulded former may be secured onto the underlying component by any suitable means - for example by gluing. Once the former has been secured in place, the Z gradient coils can be wound in the grooves in the former by any conventional winding process.

Moreover, since the former is moulded from a flexible, resilient material it is not necessary to line the grooves in the former with the elastic sheet 43, since the former itself will damp the vibrations of the windings. The use of an flexible, resilient former thus provides a further simplification of the manufacture of the coil.

The former can be made from any resilient, electrically insulating material that is sufficiently flexible to be bent into a tube around the X gradient coils or other underlying component (which will typically have a radius of 600-800mm). An example of a suitable material would be an elastomeric material, for example such as a rubber or flexible epoxy resin system.

Although the former is made of a flexible, resilient material in a preferred embodiment of the invention, the invention is not limited to this. For example, it would be possible to use a former made in two or more curved parts, as in the conventional method, but manufactured from a resilient material. Using such a former would allow the step of lining the grooves with elastic to be eliminated thus simplifying the manufacture of the

magnet to some extent. However, the step of aligning the constituent parts of the former would not be eliminated if this former were used.

Conversely, the former could be moulded as a flat former, but using a material which was not sufficiently resilient to absorb all the vibrations of the electrical conductors. Once this former had been bent around the X gradient coil or other underlying component and secured in place it would be necessary to line the former with rubber before winding the electrical conductor. While this would not achieve the full advantage of using a flexible, resilient former it would nevertheless have some advantage over the conventional method, since it would eliminate the steps of dividing the former into four parts and positioning them individually on the X gradient coil or other underlying component.

Although the present invention has been described with reference to the Z gradient coils of a magnet for an MRI system, the invention is not limited to this. On the contrary, the present invention can be applied to any magnetic device which comprises an electrical conductor wound around a former such as a superconductive or resistive coil of an MRI magnet for producing the principal ( $B_0$ ) magnetic field.

**CLAIMS:**

1. A method of manufacturing a coil for a magnet comprising: providing a curved former; and disposing an electrical conductor around the former;  
wherein the step of providing the curved former comprises the steps of:
  - a) manufacturing the former in a flat or substantially flat shape; and
  - b) bending the former into a curved shape.
2. A method as claimed in claim 1 wherein the former is manufactured from a flexible material.
3. A method as claimed in claim 1 or 2 wherein the former is manufactured from a resilient material.
4. A method as claimed in claim 1, 2 or 3 wherein the flat or substantially flat former is formed by moulding.
5. A method as claimed in any preceding claim and further comprising the step of securing the former after the step of bending the former.
6. A method as claimed in any preceding claim wherein the former comprises a groove and the electrical conductor is disposed in the groove.
7. A coil for a magnet, the coil comprising a resilient former and an electrical conductor disposed around the former.
8. A coil as claimed in claim 7 wherein the former is made of an elastomeric material.
9. A coil as claimed in claim 7 or 8 wherein a groove is defined in the former and the electrical conductor is disposed in the groove.

10. A coil as claimed in any of claims 7 to 9 wherein the former is tubular.
11. An MRI system comprising a coil as defined in any of claims 7 to 10, the coil constituting a gradient coil of the MRI system.
12. A method of manufacturing a coil for a magnet comprising the step of disposing an electrical conductor around a resilient former.

## **A Coil for a Magnet and a Method of Manufacture Thereof**

### **Abstract**

A magnet comprises an electrical conductor wound over a tubular former. The former is initially produced as a flat former, and it is bent into a tubular shape. The former is made of a resilient material to absorb vibrations of the electrical conductor.

Patented May 1, 1968

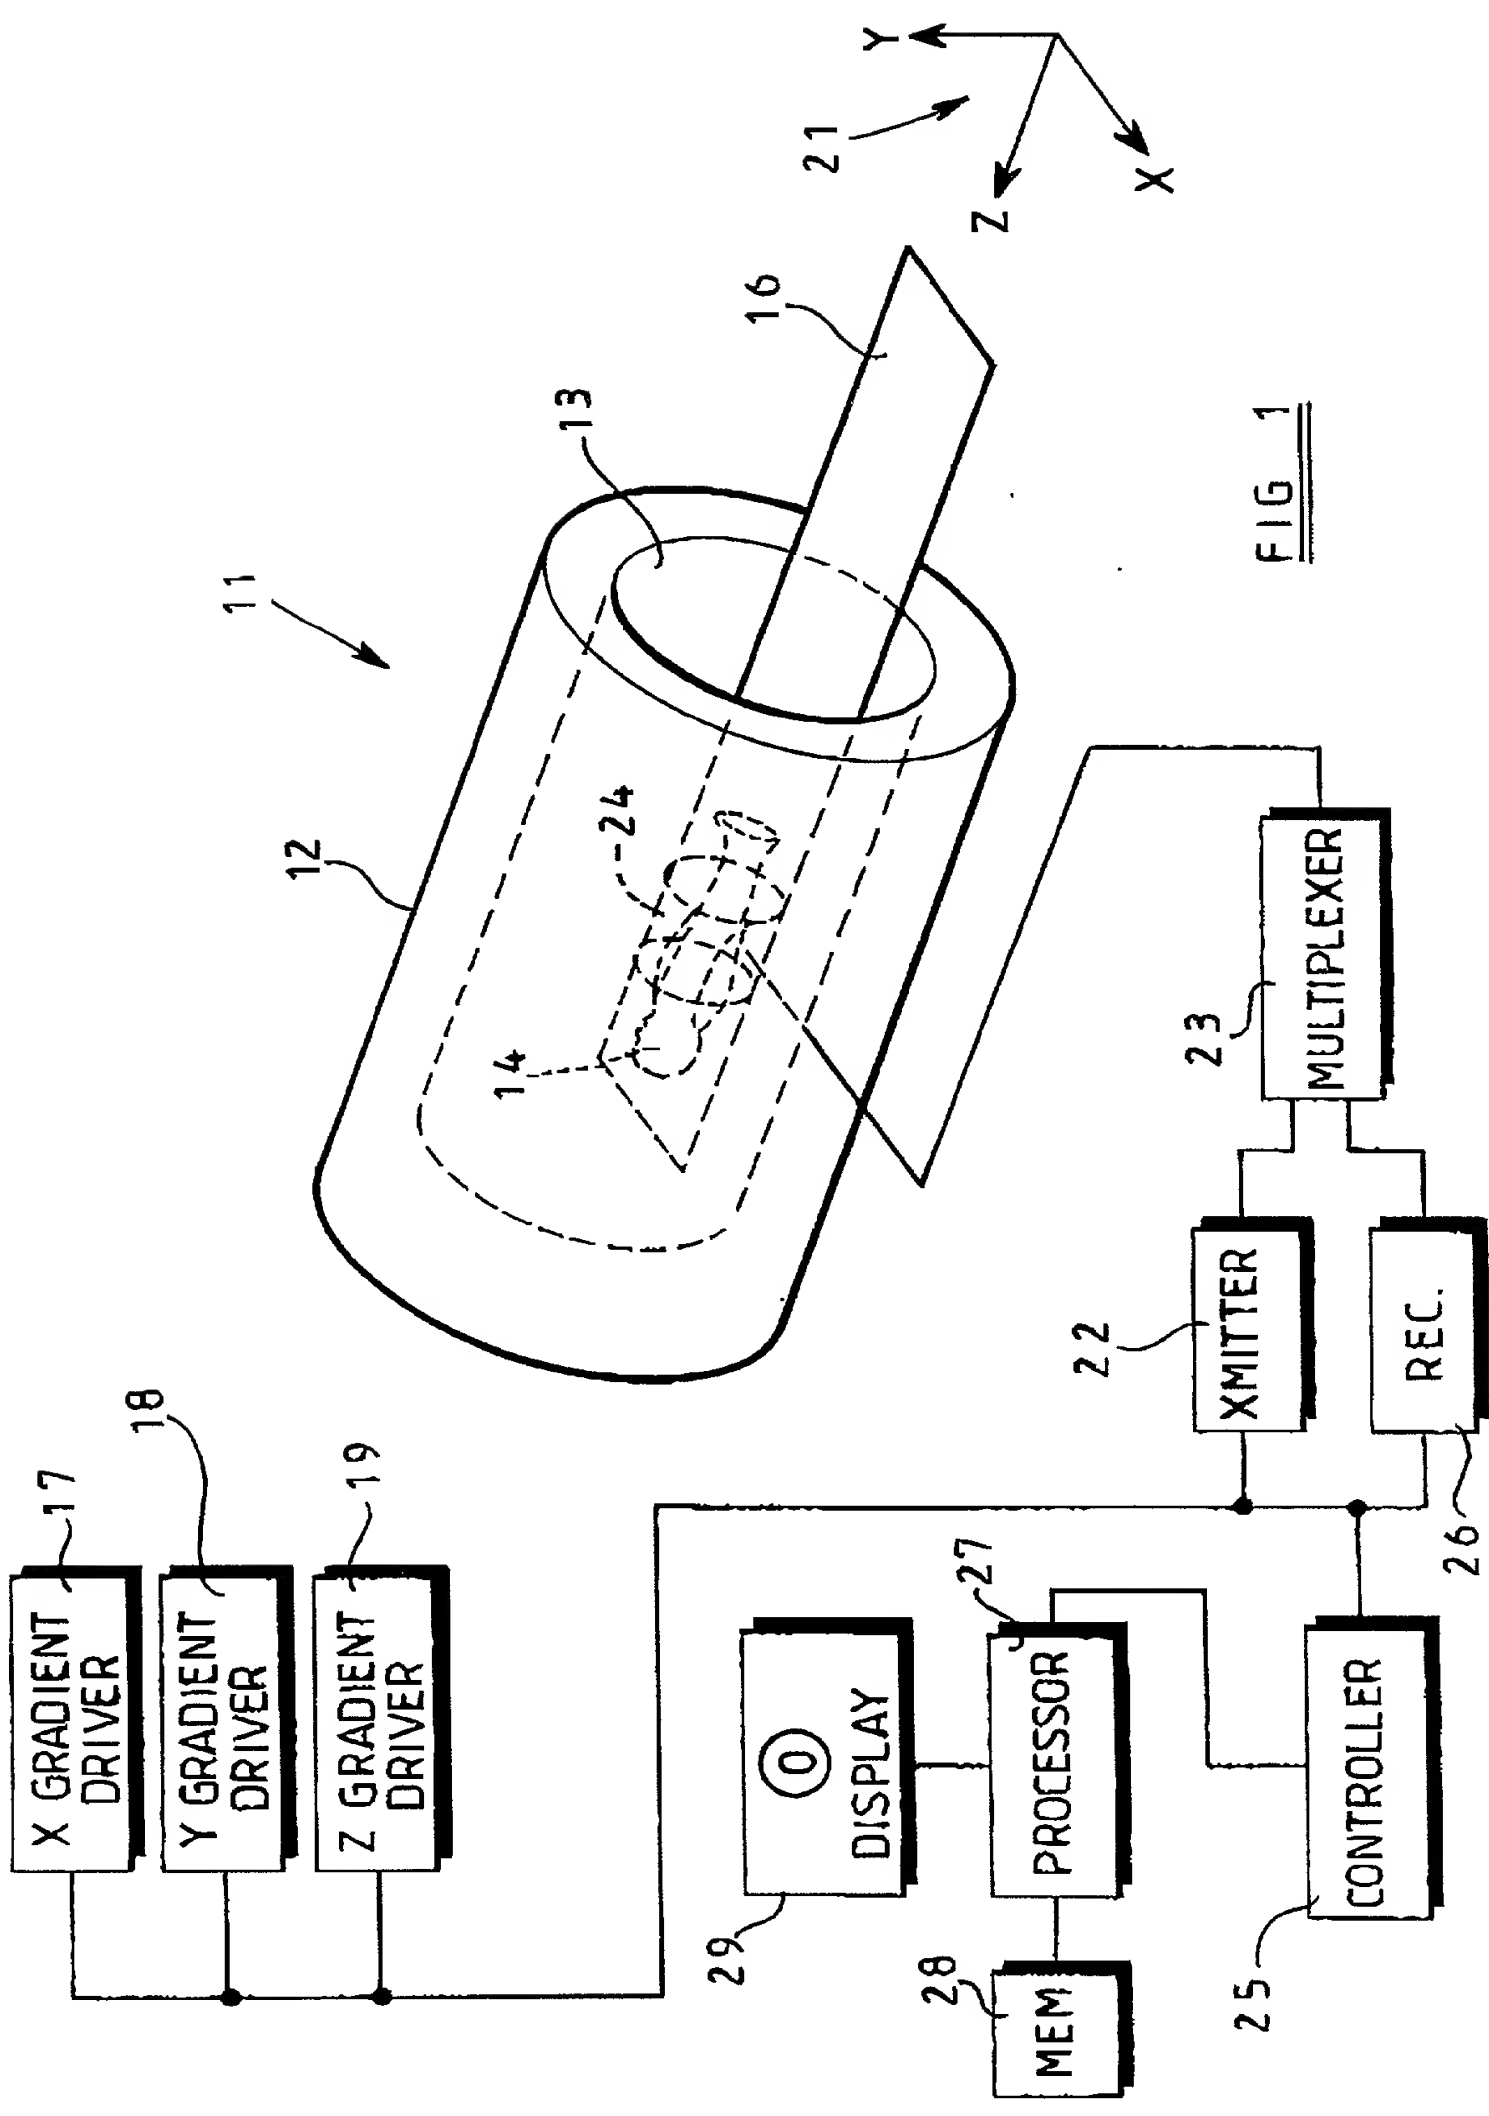


FIG. 1

